
VITA

Large area covering for calving pens and selection areas

Calves **Dairy cattle**

Comfort & hygiene

Due to its 3-layer composition, the VITA large area covering provides ideal and durable softness for every load condition and enhances sure-footedness – also for calves. Bedding is now only used to soak up any liquids and can be easily replaced after each calving. This reduces the amount of bedding used considerably. Moreover, the system can be cleaned and disinfected with ease. The jointless top covering comes in sizes up to 5.25 x 6 m. Frame bars surround the system fully. Covering strips ensure a "neat" closure toward the wall and reduce the amount of soiling.

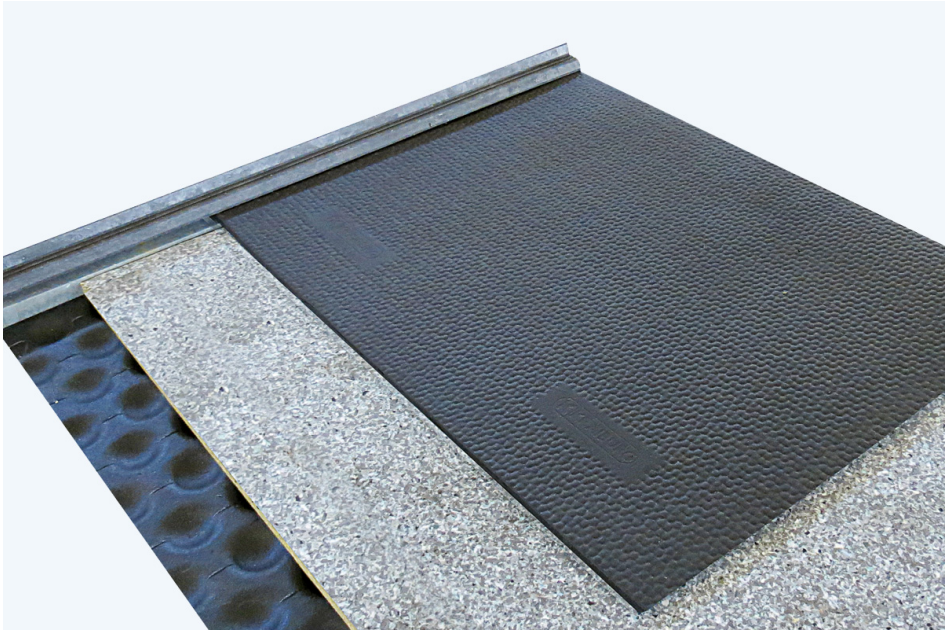

- **Jointless top covering**
- **Fully surrounded system for optimal hygiene**
- **Excellent deformability and slip resistance**

DLG FOKUS TEST 08/14 Verformbarkeit/Elastizität, Dauertrittbelastung, Säurebeständigkeit, Rutschfestigkeit

DLG FOKUS TEST 05/06 BTS-Rindvieh

Technical data

Dimensions (mm / cm)	Thickness	Width	Length
Total system	ca. 6.5 cm	max. 525 cm	max. 600 cm
consisting of:			
VITA LongLine (top covering)	15 mm	262 / 348 / 440 / 525 cm	250 cm to 600 cm (in 10-cm increments)

Dimensions (mm / cm)	Thickness	Width	Length
KRAI-PUR (foam)	25 mm	120 cm	155 cm
VITA Cup (cup-formed lower mat)	25 mm	120 cm	135 cm
VITA Top (covering strip)	5 cm	5,5 cm	200 cm
VITA Border (frame bar)	6 cm	7 cm	240 cm

Dimensions (in / ft)	Thickness	Width	Length
Total system	ca. 2 ½"	max. 206 ¾"	max. 236 ¼"
consisting of:			
VITA LongLine (top covering)	⅝"	103 ⅛ / 137 / 173 ¼ / 206 ¾ "	98 ½" to 236 ¼" (in 4" increments)
KRAI-PUR (foam)	1"	47 ¼"	61"
VITA Cup (cup-formed lower mat)	1"	47 ¼"	53 ⅛"
VITA Top (covering strip)	2"	2 ⅛"	78 ¾"
VITA Border (frame bar)	2 ½"	2 ¾"	94 ½"

Maintenance tip

Covering mat surface with bedding e.g. soft milled straw or mineral materials (moisture in the lying area can cause various conditions, including skin diseases and infections)

Treatment with a high-pressure cleaner and standard cleaning agents possible.

KRAIBURG warranty
5 years
Detailed information on our warranty (with consideration of the service life) is available upon request from your contractual partner / dealer.

Toleranzen
Width + length: +/– 1.5% (DIN ISO 3302–1 tolerance class M4)

Please refer to the relevant KRAIBURG specifications and installation instructions, which provide valuable hints and tips.

The products featured here are exclusively intended for the demonstrated applications. Technical details subject to change. Our General Terms and Conditions apply. Legal basis is the German version of the document.

***Note on imperial measurements:** Our products are manufactured according to metric specifications. The imperial measurements are therefore only intended as a guide. Inaccuracies may occur due to conversion and rounding.*

***Maintenance and usage instructions:** Our flooring for cattle husbandry has been tested under defined conditions for its slip resistance. However, the actual slip resistance in practical use depends on the relevant environmental and usage conditions. Especially moisture, dirt, mud, ice or snow, the slope, the*

condition of the ground and wear or damage can adversely affect performance characteristics. Individual factors such as health status, physical condition and exercise habits of the animals also affect slip resistance. Surfaces must therefore be checked regularly according to the relevant usage conditions, maintained and kept in proper condition. Further technical details on request.